


INYYO A103

User Manual

V1.6 2025/12/26

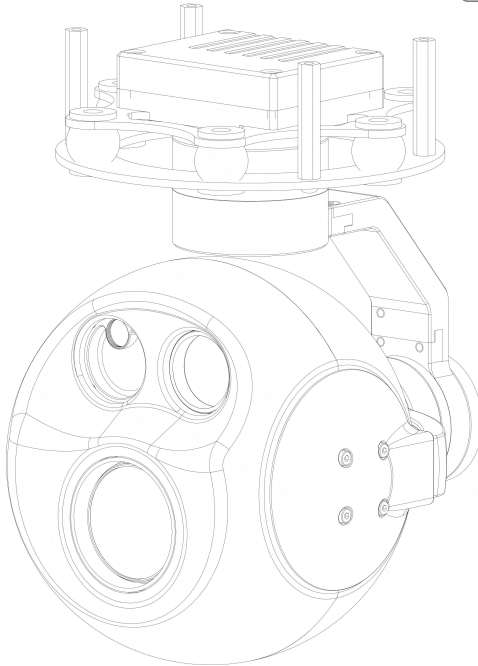

Product safety awareness is important for the safety of you, the people around you, and the environment, so be sure to read the User Manual carefully. Individual parameters of this product are updated quickly. Please refer to the latest version V1.6. The developer of this product reserves the right to interpret this document and all related documents.



Keyword search

Electronic documents can use the search function to search for keywords. In common office software, Windows users can use the shortcut key Ctrl+F, Mac users can use Command+F to search for keywords.

Click on the directory subtitle to jump

Users can click the subtitle in the directory to jump to the corresponding page.



Print

This document supports low/medium/high quality printing.



Reading prompt

Symbol specification



prohibit



Focus attention or warning



Warn



Annotation



Disclaimer

- This product and the developer/manufacturer/distributor of this product shall not be liable for damage, injury or any legal liability arising from direct or indirect use of this product, and the user shall follow all safety guidelines including but not limited to those mentioned herein.
- This product is designed to be used only for legitimate civilian purposes and not for military purposes. Any activities conducted by the user using this product are the user's personal behavior and have nothing to do with the developer/manufacturer/distributor of this product.
- Due to the rapid replacement of this type of product, partial deviation between the final physical object and the technical parameters is a normal phenomenon.
- The developer reserves the right of final interpretation of this document and all related documents, and is subject to change without prior notice.



Important Note

- Please read this manual carefully before using this product and operate in strict accordance with the manual.
- Do not attempt to disassemble, modify or repair this product by yourself. Please contact the distributor if necessary.
- If you need after-sales service, please contact the dealer, see the after-sales service related content of this article for details.

CONTENTS

Reading prompt	2
Symbol specification	2
Disclaimer	2
Important Note	2
Product Introduction	4
Overview	5
Technical Index	6
Main Part Description	10
Packing List	11
Mechanical Dimensions	12
Interface Definition	13
Installation Method	14
General Note	15
Product Use	16
S.BUS Channel description	17
Network Port Setting	19
Serial Port Instruction	24
After Sales Service	36
After Sales Service	37
Scope Of Non-After-Sales Guarantee	39

Product Introduction

This chapter mainly introduces the functional characteristics of this product, technical indicators, the name of the main core module, and the general precautions for using this product.

[>Click here to return to Table of contents<](#)

Product Introduction

Overview

- The motion camera, specially designed for the A103, has 4K visible light resolution and uses a unique motion vision focusing algorithm to maintain accurate focus at high speeds and capture and restore the natural gorgeous colors of different scenes.
- Made of aircraft aluminum alloy CNC precision machining, high strength, rapid heat dissipation, can be started under the conditions of -20℃~60℃, with good vibration absorption, rain resistance, dust resistance, corrosion resistance, can adapt to harsh field working environment.
- The advanced orthogonality triaxial stabilization PTZ has tight integration with mechanical platform, and the high-speed processor controls the motor's precise movements, achieving a high steady-state frequency to compensate for every subtle movement and maintain a stable shooting angle.
- The original intelligent mechanical design structure realizes 360 ° no blind angle rotation, can free access to unrestrained omni-directional vision.
- 13mm focal length infrared uncooled thermal camera can easily detect more distant target details, support thermal image switching, provide black heat, white heat, color palettes, adjust the color according to the scene, obtain more recognizable thermal image pictures.
- A103 adopts a 22nm advanced technology quad-core 2.0GHZ AI chip with built-in NPU computing power up to 1.0 Tops, and has automatic detection and recognition functions for typical targets such as vehicles and personnel. Multiple targets can be detected at the same time, the target detection probability is better than 90%.
- The equivalent telephoto lens can perform high-precision real-time detection tracking or feature tracking of ground targets within visual range. During the tracking process, it can resist light changes, and target scale changes, occlusion, rotation, blur, deformation and rapid movement. It has tracking auto zoom and auto tracking based on target recognition results, it's easy to perform reconnaissance, surveillance and other tasks.
- The original 3D visual positioning system can calculate the longitude and latitude coordinates, elevation information, and distance information of the screen center point target in real-time, and transmit real-time data back through the serial port and net port; It has good application value in remote distance.
- The integrated module structure greatly increases the connection strength. Let you enjoy the pleasant experience brought by the intelligent structure.
- The exterior of the control module is designed with all-metal material, With better high temperature resistance, corrosion resistance, vibration resistance, waterproof, anti-shock, anti-interference, long service life, not easy to loose and other safety features, can effectively prevent current leakage and short circuit, to ensure the reliability of electrical connection.
- The integrated control module has multiple optimization one-click function, which makes the control experience more comfortable.
- A103 pod can be compatible with all kinds of mechanical platforms, and a variety of peripheral connection schemes can make your use free from any restriction.

Technical Index

Main parameters	
Material	Aircraft aluminum alloy
Pod Size	127.1×105×161.7mm
Pod weight	737±10g
Work range	-20℃～60℃
Storage range	-30℃～70℃
Protection rank	IP43
Number of axis	Triaxial (Yaw/Pitch/Roll)
Control angle range	360° ×N(Yaw); -120° ～30° (Pitch); ±70° (Roll)
Control signal	S. BUS、TTL UART、TCP、UDP
Input voltage	12V
Power	12W
Video interface	Network
Working model	Enable follow (default); Disable follow; One-click down
Control mode	Speed control; Angle control; Point to move; Target tracking
Photo format	JPG
Video storage format	MP4
Video output format	1920*1080@30fps
Storage capacity	Mirco SD: 32GB (min)/ 512GB (max)
Visible light module	
Focal length	5～50mm(10x)
Zoom factor	10x Optical zoom/ 40x Max hybrid zoom
Zoom control mode	multiple control
FOV(H)	W: 59.16 ° ×29.58 ° ×67.1 ° T: 6.76 ° ×3.86 ° ×7.7 °
Visible light resolution	4K
Manual recognition distance(person)	1700m
Manual recognition distance(vehicle)	3600m
AI recognition distance(person)	1000m
AI recognition distance(vehicle)	3200m
Thermal Imager	

Sensor	Uncooled infrared focal plane of vanadium oxide
Focal length	13mm
FOV (H×V)	32.9° ×26.6°
Resolution	640*512
Pixel pitch	12 μm
Wavelength range	8~14 μm
NETD	≤45mK@F#1.0
Electronic zoom	1~8x
Color palettes	black heat white heat color
Manual recognition distance(person)	300m
Manual recognition distance(vehicle)	300m
AI recognition distance(person)	100m
AI recognition distance(vehicle)	100m
Laser module	
Ranging range	20-1500m
Ranging mode	Continuous ranging; Single ranging
Ranging accuracy	①≤400m±1m; ②>400m, ± (d*0.3%)
AI tracker	
Auto-detect target types	Typical targets like vehicles and people
Min target size	36×36 pixel
Target detection rate	≥90%
Image tracking accuracy	≤1pixel
Anti occlusion time	3s
Processing speed	≥30fps (@1080P)
Anti target deformation/occlusion	Auto
Target switching tracking	Support
Target tracking mode	Recognition tracking, Feature tracking
Tracking target selection method	Point tracking
Tracking autozoom	Support
Target localization	
Positioning method	Image center point positioning (GPS information needs to be received)
Positioning accuracy	<=10m(Under non complex terrain conditions)

Coordinate output type	Latitude and longitude
Buck module	
Size	50. 51 (L)*50. 35 (W)*20. 77 (H) mm
Weight	64.7±5g
Input voltage	16-58V
Output voltage	12V
Connection method	The output terminal of the buck module (XT30 port) is connected to the control module (XT30 port), and only allows separate power supply to the pod.

■ Need to use [buck module](#) to power the pod separately; The [buck module](#) cannot power other devices, nor can it power the pod at the same time as other devices.

■ Description of PTZ working mode

1. Enable follow (default mode): The yaw axis of PTZ moves in real time along the horizontal direction of the current attached equipment. After the horizontal rotation of the attached equipment, PTZ will slowly correct the position of the current yaw axis in real time for about 6s, and stop after confirming the complete reset.
2. Disable follow: Lock the plane position of the current PTZ yaw axis and no longer follow the horizontal direction of the current attached equipment. This mode have temperature drift is normal phenomenon, which is generally used for surround shooting.
3. One-click down: The pitch axis of the PTZ moved to -90°. It is used to collect orthophoto images. This function is prohibited for the upper PTZ.

■ Description of PTZ control mode

1. Speed control: Control the PTZ to move in a certain direction at an adjustable speed.
2. Angle control: Control the PTZ to rotate to a fixed angle, this function is limited to Instruction control.
3. Pointing movement: control the PTZ to rotate to the specified visual position based on the XY coordinates of the screen, this function is limited to Instruction control.
4. Target tracking: The automatic control PTZ stabilizes the selected target at the center point of the screen in real time. During the tracking process, the user cannot manually control it, and can exit the tracking mode after canceling the tracking.

■ Camera zoom mode description

1~10X is optical zoom, 10~40X is electronic zoom based on original pixel; The factory default is to turn on the 40x maximum hybrid zoom mode, which can be turned on or off through the UART/TCP command (with power off memory). After turning off the hybrid zoom mode, it will be limited to 10x optical zoom.

■ Camera zoom control mode description

Factor control: Control the zoom of the visible light camera to a fixed multiple, this function is limited to Instruction control.

■ Target tracking mode description

1. Recognition tracking: The PTZ performs high-precision automatic tracking based on the detection/recognition results of typical targets already supported by AI (typical target models are trained based on the aircraft's overhead view angle, and the detection rate cannot be guaranteed under other views), and can automatically zoom according to the size of the identified target.
2. Feature tracking: The PTZ performs image feature tracking based on the user's

selected non-AI recognition target.

■ **Target location function description**


After entering the specified receiving protocol, the photoelectric pod will automatically locate the center point target on the screen (required to be used below the pitch axis of -30°), and output the latitude and longitude coordinates of the target in the reply data and OSD display.




Please refer to the technical index of this paper for the actual use environment and specific parameters.

Main Part Description




■ Pod body:

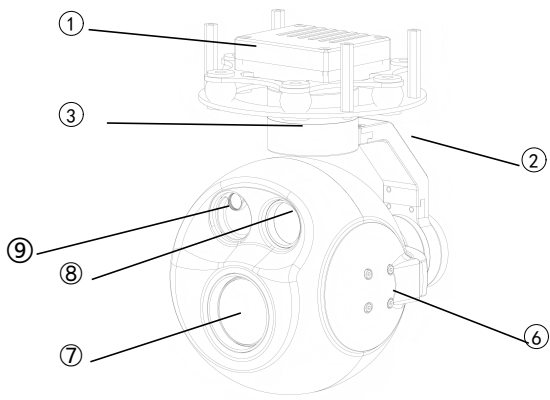

① Control module	② Yaw arm
③ Yaw electric machinery	④ Roll electric machinery
⑤ Roll arm	⑥ Pitch electric machinery
⑦ Thermal imager	⑧ Visible light camera
⑨ Laser module	⑩SD card slot

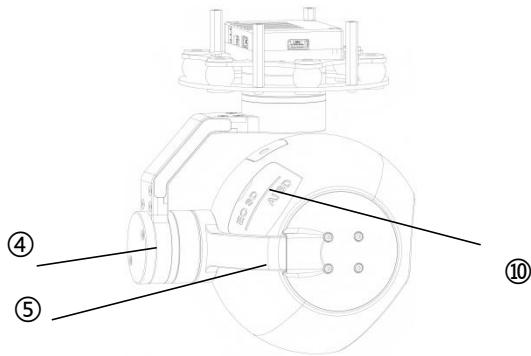

 Due to the rapid replacement of this type of product, partial deviation between the final physical object and the technical parameters is a normal phenomenon.

Packing List		
 Pod body×1	 Buck module×1	 Power cord
		 Ethernet cable
		 USB-TTL×1+dupont line×1


■ Product body packing box example:

Packing type: Heaven and earth box

Inner liner: Sponge

Packing size: 300(L)×210(W)×175(H)mm

Packing weight: 780±20g



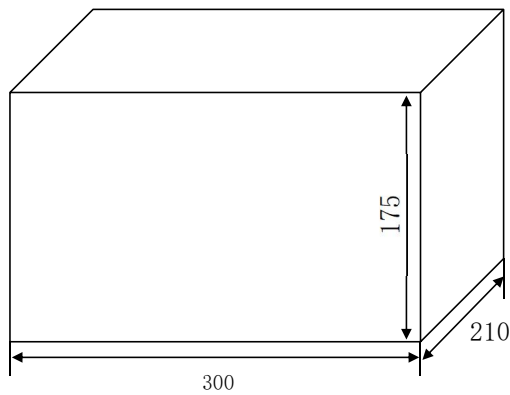


- The pod body contains 2 32G Mirco SD card.
- Due to the different user's usage environment and mechanical platforms interfaces, please equip other wire rod according to the electrical interface definition in this article. Thanks for understanding!


⚠ The above is the default packing list of this product. Please contact the distributor if you need other accessories.

Mechanical Dimensions (unit:mm)

■ Pod body:

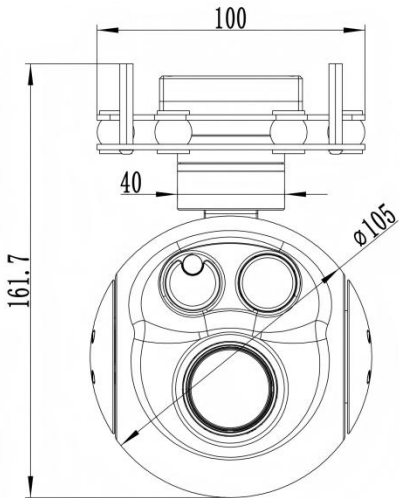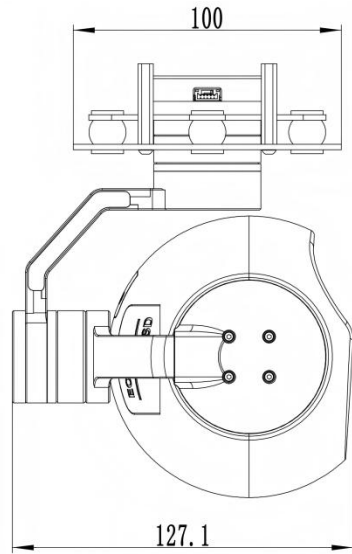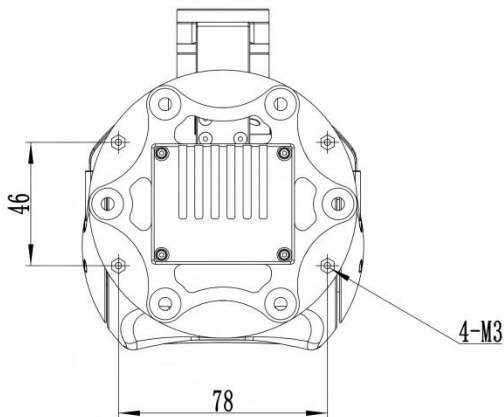


■ 12V Network port version controller(Default):

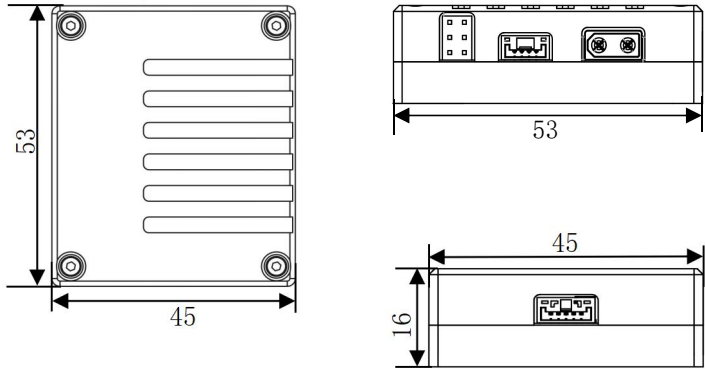

Interface Definition

■ 12V Network port version controller(Default):

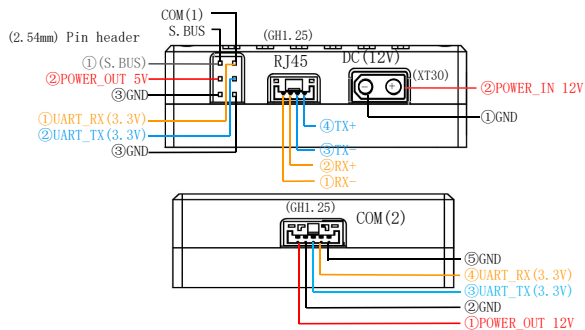


Note

DC	Power interface.
RJ45 Port	Transmiss video or TCP and UDP command control.
S.BUS	Connect the remote receiver for S.BUS stick control.
COM(1)	Connect graph/data transmission or flight control, used for serial port command control and read data, default TTL.
COM(2)	Reserved serial port, does not have control function, can only receive the "data receiving protocol" of this paper.

Installation Method

■ Control module and quick-release bracket:

■ Mechanical platforms diagram:

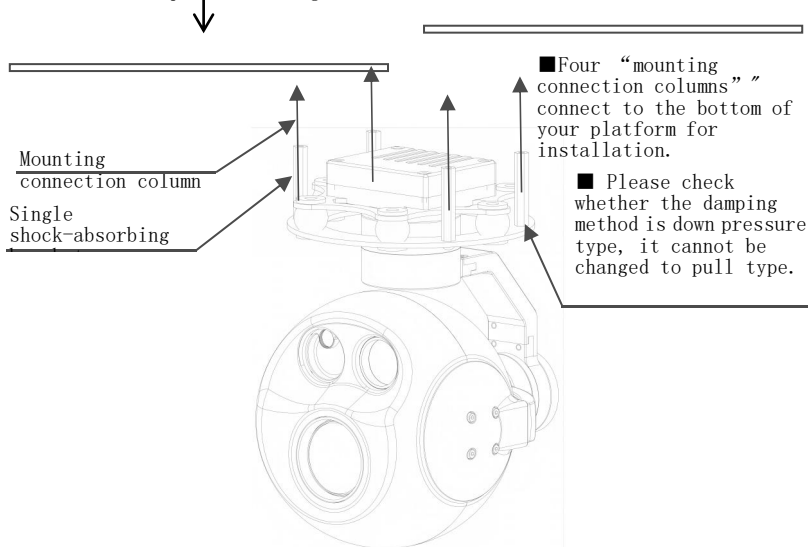

💡 Users need to drill holes on the platform themselves to install the photoelectric pod.

General Note

- Please confirm the **power supply voltage** in strict according to the electrical interface definition in this article. Do not input voltage beyond the supported range, otherwise the device will burn out;
- Before supplying power to the module, please **confirm the positive and negative poles of the power supply**;
- When using battery power, please check to **make sure the battery can supply power normally(12V)**;
- When you need to control the pod through serial port, please **do not input voltage through serial port**, otherwise it will damage control board;
- When installing the vibration damping balls, please **check whether the vibration damping mode is down pressure type**, and cannot be changed to pull type, otherwise it will cause serious consequences such as falling;
- **Ensure that the PTZ remains free from obstacles at all times.** Obstructions within the PTZ operating range can impair normal functionality and may lead to serious repercussions, such as burning out the PTZ;
- **Do not increase the hood, counterweight and other items**, otherwise the PTZ will be underperforming, and even result in burning and other serious consequences;
- Do not use thermal imaging equipment to photograph the sun, otherwise it will burn the heat sensor;
- Do not look directly at the laser beam in the backlight with your eyes or use an optical instrument to **observe the laser beam in the backlight. No flammable objects are blocked within 20cm** in front of the laser device;
- The quick-release interface **does not support hot swapping**;
- **Do not remove the SD card during shooting or video recording**, otherwise the images obtained during the photo shooting may be lost;
- **Please keep the lens clean and wipe it with a dust-free glasses cloth.** Too dirty lens will result in slow focusing speed and even cannot focus and other consequences;
- **Do not disassemble or repair by yourself**, otherwise you will not be able to enjoy the warranty service.

Product Use

This chapter describes the channel definition, network port Settings, modifying IP addresses and coding configurations, and command protocols.

[>Click here to return to Table of contents<](#)

Product Use

S. BUS Channel description

Channel (Default)	Function
RC_CH1 - Pitch	Up - Up
	Mid - Standby
	Down - Low
RC_CH2 - Zoom	Up - Narrow
	Mid - Standby
	Down - Enlarge
RC_CH3 - Yaw	Left - Towards the left
	Mid - Standby
	Right - Towards the right
RC_CH4 - Mode switch, one-click down	Up - Disable follow
	Mid - Enable follow (Default mode)
	Down - One-click down
RC_CH5 - Photography	Up - Take a photo
	Down - Start / stop recording
RC_CH6 - Target detection , Target tracking	Up - Target detection switch
	Down - Target tracking switch
RC_CH7 - One-click reset	Up - One-click reset
RC_CH8 - PIP, Pseudo-color switch	Up - black heat, white heat, color switch
	Down - Screen mode (PIP) switch
RC_CH9 - OSD switch	Up - OSD on
	Down - OSD off




Up



Mid



Down

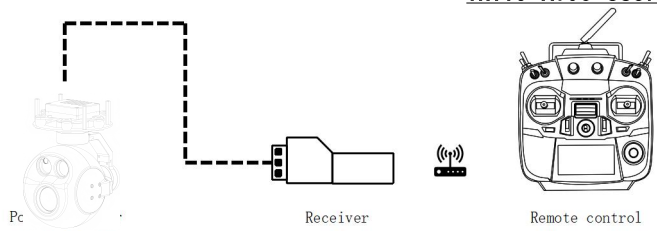

- Connect your receiver or other link transmission equipment to the S.BUS interface of the pod (conventional remote controls typically use a DuPont plug), and set up your remote control channels as needed;
- The rotation speed of PTZ is linear with the gear value, When the channel gear value is less than 50, PTZ will not act. It is normal that some remote controllers with lower accuracy cannot stop the movement of PTZ after the rocker returns to the center. When operating the rocker, the movement needs to slowly return to the center to avoid effectively.
- The camera can take pictures during recording.
- The pitch axis is self-stable, and the pitch angle relative to the plane position is maintained in real time.
- The working status of the yaw axis depends on the "Enable follow" and "Disable follow" modes.
- The horizontal roller is self-stabilizing and keeps the horizontal attitude in real time.

■ S.BUS channel setting instruction:

No.	Function	Byte	Note
1	Header	0xEE	
2	Message ID	0x82	
3	Frame length	0x1C	The length of all messages is 28 bytes
4	Pitch		The corresponding byte for each function represents the corresponding channel number, such as the pitch byte is 0x01, and the yaw byte is 0x03, which represent channel 1 controlling pitch and channel 3 controlling yaw. The channel number range is 1-16. If it exceeds the range, it cannot be set successfully, and "0" represents not activating this function.
5	Yaw		
6	Visible light zoom		
7	Visible light manual focus		
8	PTZ Mode switch, One-click down		
9	One-click reset		
10	Photography		
11	Target detection and tracking		
12	PIP, black heat, white heat, color		
13	Thermography electronic zoom		
14	Laser ranging(none)		
15	Laser night vision (none)		
16	OSD-switch		
17	Reserve		
18	Reserve		
19	Reserve		

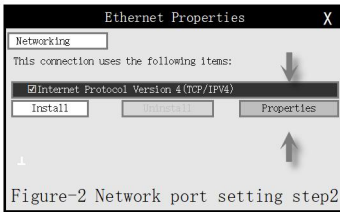


Figure-2 Network port setting step2




Figure-3 Network port setting step2

2. Open the “network” on your computer, select the “network and Internet settings” then select the “change adapter option”, and finally select “IPv4” in “Ethernet” to modify the computer website. Please make sure that the computer and pod are in the same network segment, as shown in the figure.

3. After setting the network segment of the computer, enter the url (default) 192.168.144.119:8554 into the configuration interface, and you can set the video pull flow address, url, port number, compressed format (H.264/265) and bit rate.



Figure-4 Network port setting step 4

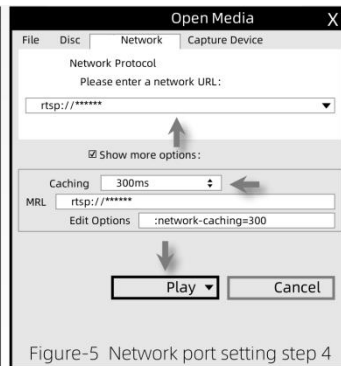


Figure-5 Network port setting step 4

4. Open VLC media player(Download software by yourself), Enter the pod RTSP video (default) address:


□ rtsp://192.168.144.119/554

“Caching” input “300ms” for better video effect.

5. TCP default control port: 2000

■ Modify IP address and video encoder configuration:

①Power up the photoelectric pod normally, connect the network port to the computer, and log in to 192.168.144.119:8554 on the browser (192.168.144.119 is the current IP address of photoelectric pod) for coding configuration.

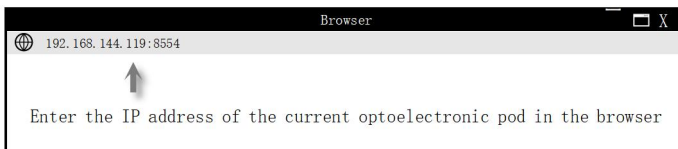

②Enter the coding configuration page, and the basic information on the configuration page is as follows:

System Setting	
System Info	
Soft Version	XTHU_CR21M_V90001RNEWPROB50
VIS model Version	5S-VIS-PL-20220914-2
IRF model Version	5S-IRF-PL-20220308-2
IR Version	xxY-yM-zzD
Device Configuration	
Camera IP:	192 168 144 119
Camera UDP Control Port:	14551 (1 ~ 65535 except 2000)
Video Compression Quality:	high
Save File Type	MP4
HDMI Output FPS:	60
Stream Type:	h.265
Resolution:	1080P
Rtsp Encoder Bitrate	2048 (500 ~ 6000)
Record Encoder Bitrate	12000 (64~100000)
Rtmp Server Name:	rtmp://192.168.144.117/live/zingto
Gateway:	192 168 144 10
Net Mask:	255 255 255 0
Web Port:	8554 (8000 ~ 9000)
RTSP Output for image transmission:	Default
OSD Display Control:	☒ photo&record ☒ directional ruler ☒ temperature measurement ☒ target coordinates ☒ functional osd ☒ aircraft coordinates ☒ focus track osd ☒ cross osd
UDP Send Setting	
UDP Send Switch:	Open
UDP Send IP:	192 168 144 117
UDP Send Port:	55012 (1024 ~ 65535 except 2000 / 8554)
UDP Send Type:	TS
Submit	
XML Upload	
Upload XML File:	Browse
Upload XML	
XML Download	
Download XML	
Download Files	
Download Videos or Photos	
Download Log	
System Control	
Restore Factory Settings	
Track Debug Open	
Format SD-CARD	
One-click Packing	
Reboot	

- System Info: System Information.
- Soft Version: The Tracker soft firmware version.

 Users need to remember the modified IP address, if you forget it, you can use "IPScan" to retrieve it.

- VIS model Version: Visible light model version.
 - IRF model Version: Thermal model version.
 - IR Version: Thermal function version.
 - Device Configuration: Device Configuration.
 - Camera IP: This product' s IP, default:192.168.144.119, port: 2000.
 - Camera UDP Control Port: UDP control port, default:14551.
 - Video Compression Quality.
 - Save File Type: Default “MP4” .
 - HDMI Output FPS: HDMI frames per second, default 30.
 - Stream Type: Default H.264.
 - Resolution: Default “1080P”.
 - Rtmp Encoder Bitrate: Default 2048.
 - Record Encoder Bitrate: Default 12000.
 - Rtmp Server Name: Default “rtmp://192.168.144.117/live/zingingo”
 - Gateway: IP Gateway.
 - Net Mask: Default 255.255.255.0.
 - Web Port: Default 8554.
 - RTSP Output for image transmission: Can choose “Default (默认)” “Real-time Priority (实时优先)” “Low-fps (低 fps)”, Default “Default” .
 - OSD Display Control: After checking the corresponding option, the screen will display the corresponding content. (photo&record、directional ruler、temperature measurement etc.) .
 - UDP Send Setting.
 - UDP Send Switch: Default “Open” .
 - UDP Send IP: Default 192.168.144.117.
 - UDP Send Port: Default 55012.
 - UDP Send Type: Default “TS”.
 - Submit: Save the parameters of the settings.
 - Download Files.
 - Click “Download Videos or Photos” can download video or photos stored this device.
 - Click “Download Log” can download Log stored this device.
 - Reboot: Reboot device.
 - After update settings, Click Submit, After Page displaying “submit ok, The configuration restart takes effect”, Clicking Reboot is OK.
- Web download video or photos remotely:
- ① Click Download Videos or Photos.
 - ② Search for the resources you want based on the date -> photos or videos
 - ③ Click on the photo or video to watch.

Index of /download/

2025-10-21/	04-Aug-2017 09:06	32K
2025-11-19/	04-Aug-2017 09:34	32K

Index of /download/2025-11-19/

photo/	04-Aug-2017 09:34	32K
video/	04-Aug-2017 09:34	32K

Index of /download/2025-11-19/photo/

2025-11-19T16-51-06-606660066.jpg	04-Aug-2017 09:34	831K
---	-------------------	------

Index of /download/2025-11-19/video/

2025-11-19T16-51-08-507.m3u8	04-Aug-2017 09:34	1M
--	-------------------	----

Serial Port Instruction

■ Protocol format:

byte1	byte 2	byte 3	byte 4	byte 5	byte 6	byte 7
Sync	Address	Instruction	Instruction	Data	Data	Check
byte	code	code1	code2	code1	code2	code

• Serial port or network port can be used for command control, and the serial port version controller baud rate 115200bps; The network IP address (default) is 192.168.144.119, and the port number is 2000;

- All the values in the protocol are hexadecimal;
- The instruction sync byte is always 0xFF;
- "Address code" is the logical address of the controlled equipment, address range: 0x01-0xFF;

0x01-0xFF;

- "Instruction code" indicates different actions;
- "Data codes" 1 and 2 represent the parameters corresponding to the pod command;
- "Check code" = byte 2 + byte 3 + byte 4 + byte 5 + byte 6;
- The "Data receiving protocol" and "S.BUS channel configuration" are only valid on the serial port.

■ Control instruction:

- Motion stop (instruction code 1 is 0x00, instruction code 2 is 0x00)

Example: 0xFF, 0x01, 0x00, 0x00, 0x00, 0x00, 0x01 (Stop all commands in speed control mode)

- Pitch up (instruction code 1 is 0x00, instruction code 2 is 0x08, data code 2 is motion speed, speed range 0x00-0xFF)

Example: 0xFF, 0x01, 0x00, 0x08, 0x00, 0xFF, 0x08 (in upward movement speed 0xFF)

- Pitch down (instruction code 1 is 0x00, instruction code 2 is 0x10, data code 2 is motion speed, speed range 0x00-0xFF)

Example: 0xFF, 0x01, 0x00, 0x10, 0x00, 0xFF, 0x10 (in downward movement speed 0xFF)

- Yaw left (instruction code 1 is 0x00, instruction code 2 is 0x04, data code 1 is motion speed, speed range 0x00-0xFF)

Example: 0xFF, 0x01, 0x00, 0x04, 0xFF, 0x00, 0x04 (to speed 0xFF movement to the left)

- Yaw right (instruction code 1 is 0x00, instruction code 2 is 0x02, data code 1 is motion speed, speed range 0x00–0xFF)

Example: 0xFF, 0x01, 0x00, 0x02, 0xFF, 0x00, 0x02 (to speed 0xFF movement to the right)

- PTZ left and up (instruction code 1 is 0x00, instruction code 2 is 0x0C, data code 1 is left motion speed, data code 2 is up motion speed, speed range 0x00–0xFF)

Example: 0xFF, 0x01, 0x00, 0x0C, 0xFF, 0xFF, 0x0B (in speed 0xFF movement on the left)

- PTZ left and down (instruction code 1 is 0x00, instruction code 2 is 0x14, data code 1 is left motion speed, data code 2 is down motion speed, speed range 0x00–0xFF)

Example: 0xFF, 0x01, 0x00, 0x14, 0xFF, 0xFF, 0x13 (in speed 0xFF movement under the left)

- PTZ right and up (instruction code 1 is 0x00, instruction code 2 is 0x0A, data code 1 is the right movement speed, data code 2 is the up movement speed, speed range 0x00–0xFF)

Example: 0xFF, 0x01, 0x00, 0x0A, 0xFF, 0xFF, 0x09 (to upper right movement with speed 0xFF)

- PTZ right and down (instruction code 1 is 0x00, instruction code 2 is 0x12, data code 1 is the right movement speed, data code 2 is the down movement speed, speed range 0x00–0xFF)

Example: 0xFF, 0x01, 0x00, 0x12, 0xFF, 0xFF, 0x11 (to lower right movement with speed 0xFF)

- Visible light zoom– (instruction code 1 is 0x00, instruction code 2 is 0x20, data code 1 is zoom speed, speed range 0x00–0x08)

Example: 0xFF, 0x01, 0x00, 0x20, 0x04, 0x00, 0x25 (Visible light zooms to the near end at speed 0x04)

- Visible light zoom+ (instruction code 1 is 0x00, instruction code 2 is 0x40, data code 1 is zoom speed, speed range 0x00–0x08)

Example: 0xFF, 0x01, 0x00, 0x40, 0x04, 0x00, 0x45 (Visible light is zoomed out to the far end at speed 0x04)

- Visible light zoom stop (instruction code 1 is 0x00, instruction code 2 is 0x60, data code 1 is 0x00)

Example: 0xFF, 0x01, 0x00, 0x60, 0x00, 0x00, 0x61 (Visible light zoom stop)

- Point to move (screen XY coordinates) (instruction code 1 is 0x10, instruction code 2 is 0x00, data code 1 is X value (↔), data code 2 is Y value (↑), speed range 0x00–0xFF, INYYO 46W does not support this function)

Example: 0xFF, 0x01, 0x10, 0x00, 0x40, 0x40, 0x91 (Point to move to the top-left 1/4 of the

screen)

- Pitch angle control (instruction code 1 is 0x10, instruction code 2 is 0x01, (data code 1*256+ data code 2) ÷ 50 are angle values (signed int16))

Example: 0xFF, 0x01, 0x10, 0x01, 0x01, 0xF4, 0x07 (Pitch rotated to 10 degrees)

- Yaw angle control (instruction code 1 is 0x10, instruction code 2 is 0x02, (data code 1*256+ data code 2) ÷ 50 are angle values (signed int16))

Example 1: 0xFF, 0x01, 0x10, 0x02, 0x13, 0x88, 0xAE (Yaw rotation to 100 degrees)

Example 2: 0xFF, 0x01, 0x10, 0x02, 0xEE, 0x6C, 0x6D (Yaw rotation to -90 degrees)

- Point tracking (screen XY coordinates) (instruction code 1 is 0x11, instruction code 2 is 0x00, data code 1 is X value (↔), data code 2 is Y value (↑), speed range 0x00-0xFF)

Example 1: 0xFF, 0x01, 0x11, 0x00, 0x40, 0x40, 0x92 (Lock the top left quarter of the screen for tracking)

Example 2: 0xFF, 0x01, 0x11, 0x00, 0x7F, 0x7F, 0x10 (Lock the center of the screen for tracking)

- Stop tracking (instruction code 1 is 0x11, instruction code 2 is 0x01)

Example: 0xFF, 0x01, 0x11, 0x01, 0x00, 0x00, 0x13 (Stop target tracking)

- Open the target detection (instruction code 1 is 0x11, instruction code 2 is 0x02, Only the photoelectric pod with AI detection, identification and tracking function supports this function)

Example: 0xFF, 0x01, 0x11, 0x02, 0x00, 0x00, 0x14 (Open the target detection identification)

- Close the target detection (instruction code 1 is 0x11, instruction code 2 is 0x03, Only the photoelectric pod with AI detection, identification and tracking function supports this function)

Example: 0xFF, 0x01, 0x11, 0x03, 0x00, 0x00, 0x15 (Close the target detection identification)

- Open test aided tracking (instruction code 1 is 0x11, instruction code 2 is 0x04, the auxiliary detection function is to use the detection ability to prevent the loss of the target when the target tracking is blocked, and only the photoelectric pod with AI detection, recognition and tracking function supports this function)

Example: 0xFF, 0x01, 0x11, 0x04, 0x00, 0x00, 0x16 (Open test aided tracking)

- Close test aided tracking (instruction code 1 is 0x11, instruction code 2 is 0x05,

only the photoelectric pod with AI detection, recognition and tracking function supports this function)

Example: 0xFF, 0x01, 0x11, 0x05, 0x00, 0x00, 0x17 (Close test aided tracking)

- Take a picture (instruction code 1 is 0x12, instruction code 2 is 0x00)

Example: 0xFF, 0x01, 0x12, 0x00, 0x00, 0x00, 0x13 (Take a picture)

- Start recording (instruction code 1 is 0x12, instruction code 2 is 0x01)

Example: 0xFF, 0x01, 0x12, 0x01, 0x00, 0x00, 0x14 (Start recording)

- Stop recording (instruction code 1 is 0x12, instruction code 2 is 0x02)

Example: 0xFF, 0x01, 0x12, 0x02, 0x00, 0x00, 0x15 (Stop recording)

- Enable follow (instruction code 1 is 0x13, instruction code 2 is 0x00)

Example: 0xFF, 0x01, 0x13, 0x00, 0x00, 0x00, 0x14 (Switch to Enable follow)

- Disable follow (instruction code 1 is 0x13, instruction code 2 is 0x01)

Example: 0xFF, 0x01, 0x13, 0x01, 0x00, 0x00, 0x15 (Switch to Disable follow)

- One-click down (instruction code 1 is 0x13, instruction code 2 is 0x02, used to collect ortho image, this function is disabled when PTZ is mounted)

Example: 0xFF, 0x01, 0x13, 0x02, 0x00, 0x00, 0x16 (PTZ pitch axis turned to -90° , maintain vertical looking posture)

- One-click reset (instruction code 1 is 0x13, instruction code 2 is 0x03)

Example: 0xFF, 0x01, 0x13, 0x03, 0x00, 0x00, 0x17 (Yaw axis and pitch axis return to the middle position)

- Picture-in-picture mode switching (instruction code 1 is 0x14, instruction code 2 is 0x00, data code 1 is picture mode, 0x00: visible light embedded thermal imaging, 0x01: thermal imaging embedded visible light, 0x02: visible light, 0x03: thermal imaging, only the photoelectric pod containing a variety of optical camera modules has this function)

Example: 0xFF, 0x01, 0x14, 0x00, 0x02, 0x00, 0x17 (Switch to visible light)

- Thermal imaging black heat, white heat, color switching (instruction code 1 is 0x15, instruction code 2 is 0x00, data code 1 is black heat, white heat, color switch, 0x00: white heat, 0x01: black heat, 0x02: color, only the photoelectric pod containing the thermal imaging module has this function)

Example: 0xFF, 0x01, 0x15, 0x00, 0x01, 0x00, 0x17 (Thermal imaging mode switch to black heat)

- Single ranging/Triggered Location (instruction code 1 is 0x16, instruction code 2 is 0x00, Only optical Pods containing laser ranging modules have this function. (Laser ranging pods can automatically locate targets after entering the specified protocol and ranging at the same time.))

Example: 0xFF, 0x01, 0x16, 0x00, 0x00, 0x00, 0x17 (Distance once and target location)

- Turn on continuous ranging (instruction code 1 is 0x16, instruction code 2 is 0x01, Only the photonics pod containing the laser ranging module has this function)

Example: 0xFF, 0x01, 0x16, 0x01, 0x00, 0x00, 0x18 (Turn on continuous ranging)

- Turn off continuous ranging (instruction code 1 is 0x16, instruction code 2 is 0x02, Only the photonics pod containing the laser ranging module has this function)

Example: 0xFF, 0x01, 0x16, 0x02, 0x00, 0x00, 0x19 (Turn on continuous ranging)

- Thermal imaging electronic zoom (instruction code 1 is 0x17, instruction code 2 is 0x00, data code 1 is electronic zoom multiple (1-8 times), 0x00:1 times, 0x01:2 times, 0x02:3 times, 0x03:4 times, only the photoelectric pod containing the thermal imaging module has this function)

Example: 0xFF, 0x01, 0x17, 0x00, 0x01, 0x00, 0x19 (Thermal imaging zoom to 2X)

- Turn on electronic image stabilization (instruction code 1 is 0x18, instruction code 2 is 0x00, only the photoelectric pod with AI detection, identification and tracking function supports this function)

Example: 0xFF, 0x01, 0x18, 0x00, 0x00, 0x00, 0x19 (Turn on electronic image stabilization)

- Turn off electronic image stabilization (instruction code 1 is 0x18, instruction code 2 is 0x01, only the photoelectric pod with AI detection, identification and tracking function supports this function)

Example: 0xFF, 0x01, 0x18, 0x01, 0x00, 0x00, 0x1A (Turn off electronic image stabilization)

- Turn on OSD (instruction code 1 is 0x19, instruction code 2 is 0x00)

Example: 0xFF, 0x01, 0x19, 0x00, 0x00, 0x00, 0x1A (Open screen OSD information)

- Turn off OSD (instruction code 1 is 0x19, instruction code 2 is 0x01)

Example: 0xFF, 0x01, 0x19, 0x01, 0x00, 0x00, 0x1B (Close screen OSD information)

- Turn on visible light manual focus (instruction code 1 is 0x1D, instruction code 2 is 0x00)

Example: 0xFF, 0x01, 0x1D, 0x00, 0x00, 0x00, 0x1E (Turn on visible light manual focus)

- Turn off visible light manual focus (instruction code 1 is 0x1D, instruction code 2 is 0x01)

Example: 0xFF, 0x01, 0x1D, 0x01, 0x00, 0x00, 0x1F (Turn off visible light manual focus)

- Focus the near end manually (instruction code 1 is 0x1D, instruction code 2 is 0x02)

Example: 0xFF, 0x01, 0x1D, 0x02, 0x00, 0x00, 0x20 (Visible to the remote focusing)

- Focus the distal end manually (instruction code 1 is 0x1D, instruction code 2 is 0x03)

Example: 0xFF, 0x01, 0x1D, 0x03, 0x00, 0x00, 0x21 (Restore default video streaming address)

- Manual focus Stop (instruction code 1 is 0x1D, instruction code 2 is 0x04)

Example: 0xFF, 0x01, 0x1D, 0x04, 0x00, 0x00, 0x22

- Query S.BUS channel configuration (instruction code 1 is 0x1E, instruction code 2 is 0x00, the current S.BUS channel configuration will be returned after sending)

Example: 0xFF, 0x01, 0x1E, 0x00, 0x00, 0x00, 0x1F (Query S.BUS channel configuration)

- Query movement time (instruction code 1 is 0x1E, instruction code 2 is 0x01)

Example: 0xFF, 0x01, 0x1E, 0x01, 0x00, 0x00, 0x20

- Query version (instruction code 1 is 0x1E, instruction code 2 is 0x02. Return data format: EE, 06, 0B, Version type, pod model, date, time, minute, sum check. The date is 3 bytes, and the rest are 1 bytes.)

Example: 0xFF, 0x01, 0x1E, 0x02, 0x00, 0x00, 0x21

- Specifies the return frequency of pod status information (instruction code is 0x20 0x00, data code 1 is the return frequency, 0x01 corresponds to 1Hz, 0x02 corresponds to 2Hz (default), 0x03 corresponds to 3Hz, ... 0x09 corresponds to 9Hz, 0x0A corresponds to 10Hz, and the value ranges from 1 to 10Hz)

Example 1: 0xff, 0x01, 0x20, 0x00, 0x02, 0x00, 0x23 (The return frequency of pod status information is 2Hz)

Example 2: 0xff, 0x01, 0x20, 0x00, 0x0A, 0x00, 0x2B (The return frequency of pod status information is 10Hz)

- Restore default video streaming address (instruction code 1 is 0x21, instruction code 2 is 0x00)

Example: 0xFF, 0x01, 0x21, 0x00, 0x00, 0x00, 0x22 (Only have AI detection identification tracking function of photoelectric pod to support this feature)

- Query the pull address(instruction code 1 is 0x21, instruction code 2 is 0x01)

Example: 0xFF, 0x01, 0x21, 0x01, 0x00, 0x00, 0x23 (Only have AI detection identification tracking function of photoelectric pod to support this feature)

- Turn on PTZ(instruction code 1 is 0x22, instruction code 2 is 0x00)

Example: 0xFF, 0x01, 0x22, 0x00, 0x00, 0x00, 0x23

- Turn off PTZ(instruction code 1 is 0x22, instruction code 2 is 0x01)

Example: 0xFF, 0x01, 0x22, 0x01, 0x00, 0x00, 0x24

- PTZ reboot(instruction code 1 is 0x22, instruction code 2 is 0x02)

Example: 0xFF, 0x01, 0x22, 0x02, 0x00, 0x00, 0x25

- Movement reboot(instruction code 1 is 0x22, instruction code 2 is 0x03)

Example: 0xFF, 0x01, 0x22, 0x03, 0x00, 0x00, 0x26

- Set data reply frequency (instruction code 1 is 0x20, instruction code 2 is 0x00, data code 1 is frequency, support 1-10Hz)

Example: 0xFF, 0x01, 0x20, 0x00, 0x0A, 0x00, 0x2B (Set data reply frequency to 10Hz)

- The initial movement speed of the in PTZ speed control mode is 0-45 ° /s;
- The initial movement speed of the One-click reset/One-click down, angle control, point to move function is about 300 ° /s. When approaching the specified angle, the speed will gradually decrease to complete the action;
- The angle control Instruction cannot input the angle value exceeding the working range of the PTZ;
- The default data reply frequency is 2Hz;
- After entering the specified receiving protocol, the photoelectric pod will automatically conduct target positioning.

■ Response data:

No.	Function	Byte	Note
1	Header	0xEE	
2	Message ID	0x01	
3	Frame length	0x1D	The length of all messages is 29 bytes
4	Laser ranging distance	Low eight	Product data without laser

5	(decimeter)	High eight	ranging function is 0
6	PTZ roll angle (@0.1°)	Low eight	Tilting left is negative, tilting right is positive
7		High eight	
8	PTZ pitch angle (@0.1°)	Low eight	Head down is negative, head up is positive
9		High eight	
10	PTZ yaw angle (@0.1°)	Low eight	Turn right from 0 to 180
11		High eight	Turn left from 0 to -180
12	Visible light zoom multiple (integer)		
13	Track status		0x00: Not tracked 0x01: Tracking
14	Target latitude*10000000	Low byte	Example: The actual latitude is 38.1234567, and the four byte data is 381234567
15			
16			
17		High byte	
18	longitude*10000000	Low byte	Example: The actual longitude is 114.1234567, and the data of these four bytes is 1141234567
19			
20			
21		High byte	
22	Target height (decimeter)	Low eight	
23		High eight	
24	Visible light zoom multiple (0.1x)	Low eight	
25		High eight	
26	Reserve		
27	Reserve		
28	PTZ working mode		0x00: Enable follow, 0x01: Disable follow, 0x02: One-click down
29	Sum check		1-28 bytes sum, take the lower eight bits

*Example: 0xEE, 0x01, 0x1D, 0xB8, 0x0B, 0x32, 0x00, 0x3E, 0xFE, 0xE8, 0x03, 0x05, 0x01, 0x87, 0x

2D, 0xB9, 0x16, 0x87, 0xDB, 0x05, 0x44, 0x7B, 0x00, 0x00, 0x00, 0x00, 0x00, 0x01, 0xD8

(Laser ranging is 300m, roll angle is 5° , pitch angle is -45° , yaw angle is 100° , visible light zoom is 5x, tracking is underway, target latitude is 38.1234567, target longitude is 114.1234567, target altitude is 12.3m, and PTZ working mode is disable follow.)

■ Data receiving protocol:

No.	Function	Byte	Note
1	Header	0xEE	
2	Message ID	0x81	
3	Frame length	0x22	The length of all messages is 34 bytes
4	Aircraft (mechanical platforms) roll angle (@0.1°)	Low eight	Tilting left is negative, tilting right is positive
5		High eight	
6	Aircraft (mechanical platforms) pitch angle (@0.1°)	Low eight	Head down is negative, head up is positive
7		High eight	
8	Aircraft (mechanical platforms) yaw angle (@0.1°)	Low eight	Turn right from 0 to 180
9		High eight	Turn left from 0 to -180
10	Aircraft (mechanical platforms) latitude*10000000	Low byte	Example: The actual latitude is 38.1234567, and the four byte data is 381234567
11			
12			
13		High byte	
14	Aircraft (mechanical platforms) longitude*10000000	Low byte	Example: The actual longitude is 114.1234567, and the data of these four bytes is 1141234567
15			
16			
17		High byte	
18	Aircraft (mechanical platforms) altitude (decimeter)	Low eight	
19		High eight	

20	Aircraft (mechanical platforms) relative height (decimeter)	Low eight	
21		High eight	
22	GPS time (Beijing time)	Year	Example: This byte will be 21 in 2021
23		Month	
24		Day	
25		Hour	24-hour
26		Minute	
27		Second	
28	Aircraft (mechanical platforms) eastward speed(cm/s)	Low eight	East direction is positive
29		High eight	
30	Aircraft (mechanical platforms) northbound speed(cm/s)	Low eight	North direction is positive
31		High eight	
32	Aircraft (mechanical platforms) ascent speed(cm/s)	Low eight	Sky direction is positive
33		High eight	
34	Sum check		1-33 bytes sum, take the lower eight bits

• Example:

0xEE, 0x81, 0x22, 0x32, 0x00, 0x3E, 0xFE, 0xE8, 0x03, 0x87, 0x2D, 0xB9, 0x16, 0x87, 0xDB, 0x05, 0x44, 0xD0, 0x07, 0x7B, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x6A

(The aircraft (mechanical platforms) roll angle is 5° , pitch angle is -45° , yaw angle is 100° , latitude is 38.1234567, longitude is 114.1234567, altitude is 200, relative height is 12.3)

■ Current S.BUS channel configuration reply:

No.	Function	Byte	Note
-----	----------	------	------

1	Header	0xEE	
2	Message ID	0x04	
3	Frame length	0x1C	The length of all messages is 28 bytes
4	Pitch		The corresponding byte for each function represents the corresponding channel number, such as the pitch byte is 0x01, and the yaw byte is 0x03, which represent channel 1 controlling pitch and channel 3 controlling yaw. The channel number range is 1-16. If it exceeds the range, it cannot be set successfully, and "0" represents not activating this function.
5	Yaw		
6	Visible light zoom		
7	Visible light manual focus		
8	PTZ Mode switch, One-click down		
9	One-click reset		
10	Photography		
11	Target detection and tracking		
12	PIP, black heat, white heat, color		
13	Thermography electronic zoom		
14	Laser ranging (none)		
15	Laser night vision (none)		
16	OSD-switch		
17	Reserve		
18	Reserve		
19	Reserve		
20	Reserve		
21	Reserve		
22	Reserve		
23	Reserve		
24	Reserve		

After Sales Service

This chapter mainly introduces the after-sales service and the relevant statements of the scope of non-after-sales protection.

[>Click here to return to Table of contents<](#)

After Sales Service

After Sales Service

- General Terms of Service: This after-sales service only applies to the terminal products purchased by you for your own use and not for resale. Users should carefully follow the instructions in the product manual to use the products and follow the service procedures of the distributor.

- Product warranty period: Please confirm the specific warranty period with the dealer before purchasing this product. The warranty period of this product starts from the day after you receive the goods, and valid proof of purchase, bills, invoices and order numbers must be provided.

- Warranty parts: Pod shell, power control module, buck module, lens equipment, quick-release bracket (excluding wire); Other accessories in addition to the above parts are not covered by the warranty.

- Application for after-sales service: During the warranty period, if the product can not achieve the guaranteed function, please contact the relevant service personnel of the dealer, and explain the problem of the product in detail, in order to obtain the corresponding after-sales service; If you cannot solve your problem through telephone or remote video communication, you need to contact logistics to send the product to the designated address according to the dealer's designated service personnel for further testing, and the dealer will arrange service according to the type of warranty service enjoyed by the product;

The application for product repair requires a guarantee that the distributor or manufacturer has full, free and safe access to your equipment to provide after-sales service, and that the product or part is free from any legal restrictions preventing its replacement; If the product or part is not owned by you, obtain a license from the owner of the product or part so that the distributor or manufacturer can provide you with after-sales service.

- Replacement of products and parts: If your warranty service involves replacement of products or parts, the replaced products or parts will become the property of the distributor or manufacturer, and the replaced products or parts will become your

property, and only the original parts of the product can be replaced without modification; The replacement product or part provided by the after-sales service may not be new, but it can be guaranteed that the updated part can be in good working condition and at least equal in performance to the replaced part, and the replaced product or part enjoys the same warranty service during the remaining warranty period of the original product.

- The delivery fee shall be confirmed with the distributor in advance, and the cost of sending to the company shall be borne by the customer.
- Do not disassemble or repair yourself, otherwise you will not be able to enjoy the product warranty service.
- All final interpretation rights belong to the product developer.



Please take good care of all the purchase documents and relevant electronic documents of this product.

Scope Of Non-After-Sales Guarantee

- Device wear, fragmentation, burning and other accidents caused by man-made non product quality problems.
 - Damage caused by unauthorized modification, disassembly and shell opening under the guidance of unofficial instructions.
 - Damage caused by improper installation, use and operation not in accordance with the instructions in the product manual.
 - Repair damage caused by assembly parts by yourself.
 - Damage caused by circuit modification guided by unofficial instructions, or improper use of battery packs and chargers.
 - Damage caused by handling in extremely harsh environments, such as wind, rain, dust, etc.
 - Damage caused by manipulation in a complex electromagnetic environment or strong interference source environment, such as mining areas, towers, high-voltage lines, substations, etc.
 - Damage caused by mutual interference with other wireless devices, such as transmitter, signal transmission, WiFi signal interference.
 - Damage caused by forced operation when parts are aged or damaged.
 - Damage caused by reliability and compatibility issues when used with third-party components that are not certified by developers and manufacturers.
 - Damage caused by insufficient discharge when the power supply is insufficient, or the voltage is too high, or when the battery with defective quality is used.
 - Uninterrupted or faulty operation of the product.
 - Continuous or wrong operation of the product.
 - Failure or damage caused by any third party product (including all other products supplied by the distributor/manufacturer or integrated into the Product at your request).
 - Change or tear off the identification label and damage the anti tear sticker.
 - Unable to provide valid purchase vouchers or forge, alter behavior.
-

- Force majeure caused by local policies, natural disasters or other special reasons will not be able to provide after-sales service.



Please take good care of all the purchase documents and relevant electronic documents of this product.

Thank you for your use

This product is approved to leave factory as it meets the manufacturer's standard after inspection.

[>Click here to return to Table of contents<](#)